


Masonry supporting wall to Engineer's specification

Min. 30mm mortar fill (dry pack as work proceeds)

Integritank

Min. 65mm sand cement screed

Integritank

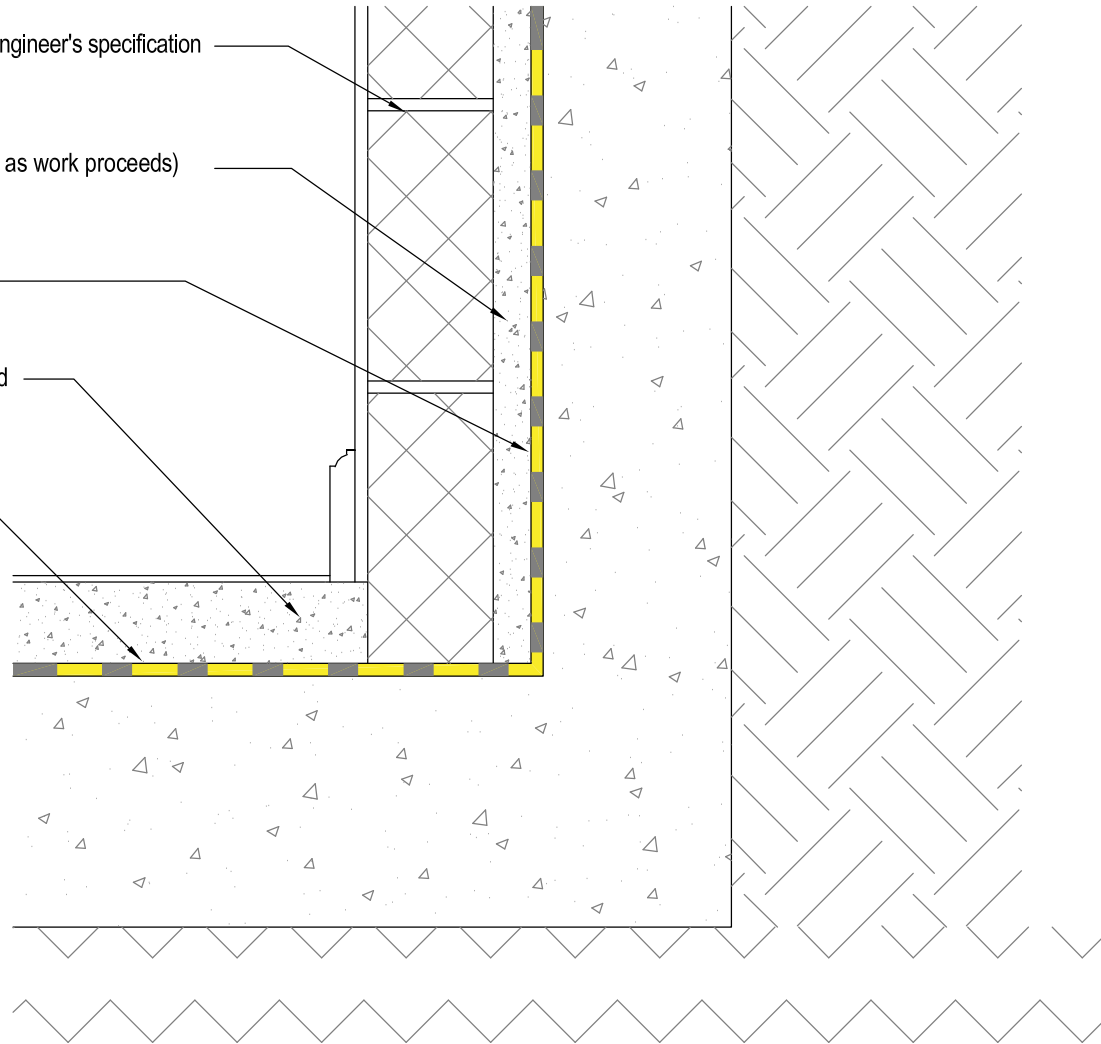

Notes:

Consult BS 8102

This sketch detail is provided for general guidance purposes only and is not offered as a detailed contract drawing / specification, unless otherwise confirmed in writing by Stirling Lloyd Polychem Ltd. The specifier must ensure its suitability for each individual site, taking account of any specific requirements that exist.

Guidance Detail: **Structural Waterproofing: Typical Internal Tanking Detail**

Project:

Project No:

Drawing No: **MA 421/2**

Date:

Scale: **N.T.S.**

stirling lloyd

THE TECHNOLOGY OF PROTECTION

Union Bank, King Street, Knutsford, Cheshire, WA16 6EF, UK.
Tel: 01565 633111 Fax: 01565 63355
Email: info@stirlinglloyd.com Web Site: www.stirlinglloyd.com